
	Document Type:	Plan
<b>Construction Environmental Management Plan</b>	Date:	2012-07-15
	Page:	1 of 25




**CONSTRUCTION ENVIRONMENTAL MANAGEMENT PLAN**  
**-CEMP-**

**VUTCANI EXTENSION Wind farm**

**Vaslui County**  
**Moldavia Region**


Prepared by:	Reviewed by:	Approved by:
EDP Renovaveis Laura Lazar Dpt.: ENVIRONMENT & SUSTAINABILITY Date: 2012-07-15	EDP Renovaveis Tekin Omer Dpt.: ENVIRONMENT & SUSTAINABILITY Date: 2012-07-15	EDP Renovaveis Jose Angel Diaz Dpt.: ENVIRONMENT & SUSTAINABILITY Date: 2012-07-15

 <b>edp renováveis</b>	Document Type:	Plan
Construction Environmental Management Plan	Date:	2011-05-1
	Page:	2 of 25

### **Table of contents**

<b>I.</b>	<b>INTRODUCTION</b>	<b>3</b>
1.	General	3
2.	Purpose and scope	3
3.	Overview Of Environmental Assessment	3
4.	Projects Overview	3
5.	Owner	4
6.	Objectives of CEMP	5
<b>II.</b>	<b>Environmental objectives and targets</b>	<b>6</b>
<b>III.</b>	<b>Legislative framework</b>	<b>8</b>
<b>IV.</b>	<b>Statements of commitments</b>	<b>9</b>
<b>V.</b>	<b>Roles and responsibilities</b>	<b>13</b>
<b>VI.</b>	<b>ENVIRONMENTAL AND CONSTRUCTION GUIDELINES</b>	<b>14</b>
1.	Agricultural Soils	15
2.	Contaminated Soils	15
3.	Erosion And Sediment Control	17
4.	Site Organization	18
5.	Traffic Control	18
6.	Noise Control	18
7.	Dust Control	18
8.	Equipment Maintenance	19
9.	Oils Storage, Handling And Disposal	19
10.	Fuel And Hazardous Material Spills	19
11.	Personnel	20
12.	Accidents On Site	20
13.	Provision Of Water	21
14.	Cement And Concrete Operations	21
15.	Solid Waste Management	21
16.	Site Clean Up	21
17.	Environmental Monitoring	21
18.	Safety Monitoring	22

Annex 1. Legislative framework

	Document Type:	Plan
<b>Construction Environmental Management Plan</b>	Date:	2012-07-15
	Page:	3 of 25

## I. INTRODUCTION

### A. General

The **CEMP** establishes what an organization needs to do in order to manage itself so as to meet its environmental, economic and social goals.

The main role of this **CEMP** is to outline the contractors approach to environmental management through the construction phases with the primary aim of reducing any adverse impacts from construction.

### B. Purpose and scope

EDP has developed this **CEMP** for implementation during construction of **VUTCANI EXTENSION Wind Farm** (Project).

The **CEMP** describes how EDP's proposes to manage and control the environmental aspects of the Project during the construction phases. The **CEMP** will be applicable to all EDP's staff and contractors during the Project.

### C. Overview Of Environmental Assessment

In order to fulfill the environmental assessment the following documents were analysed:

- **VUTCANI EXTENSION Environmental Impact Assessment** Report.
- **Environmental Agreement No 106 from 09.07.20112** issued by Vaslui Environmental protection Agency, for the construction of VUTCANI EXTENSION (ALBESTI) wind farm

### D. Project Overview


The site for the proposed wind farm project is located in rural area in **Ciocarla commune**, being used for agricultural purposes (pasture and arable).

**Construction Environmental  
Management Plan**

 Date:  
Page:

 2012-07-15  
4 of 25

The proposed wind farm at **VUTCANI EXTENSION** will contain 14 wind turbines (turbine model VESTAS V100 2.0 MW), providing a total installed capacity of **28 MW**.

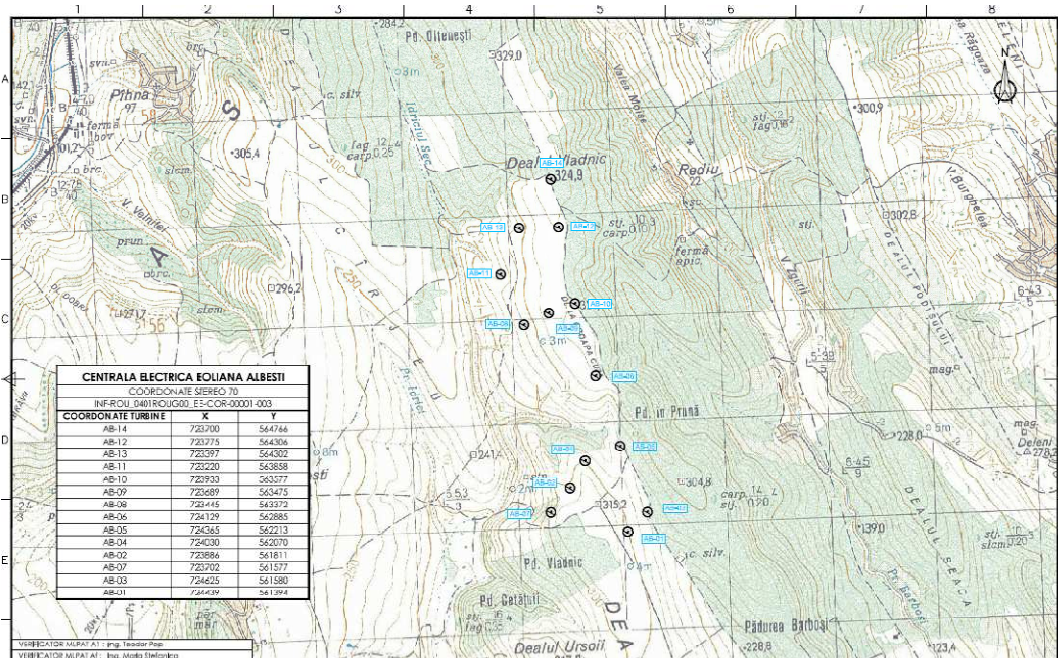


The project's objectives and contractors are:

Objective	Contractor
Civil works for Wind farm	SC CJR LUSO ENERGIE SL
Wind turbine	VESTAS
VUTCANI EXTENSION WF Substation	SEMIRUMA SRL
High voltage line	-
Power transformers	SIEMENS SA
Meteorological towers	VESTAS

### E. Owner

VUTCANI EXTENSION WF is wholly-owned by **SC SIBIOARA WIND FARM SRL** a Romanian company, owned 85% by **EDP Renovaveis SA** ("EDPR"), through its wholly-owned European subsidiary Nuevas Energias de Occidente, S.L., and 15% by Renovatio Group Ltd. ("Renovatio Group").

EDPR and Renovatio Group are the Project Sponsors. EDPR is the renewable energy arm of the Energias de Portugal Group ("EDP") and is

	Document Type:	Plan
<b>Construction Environmental Management Plan</b>	Date:	2012-07-15
	Page:	5 of 25


the world's third largest wind energy company, with installed capacity of 5,577 MW as of December 31, 2009 and additional 1,293 MW under construction. EDPR owns wind asset portfolios in Spain, Portugal, France, Belgium, Poland, Romania, the United States, Italy and Brazil. The company is listed on the Euronext stock exchange with 22.5% of its shares publicly-held and 77.5% owned directly or indirectly by EDP. Renovatio Group is privately-held and is EDPR's local partner for wind power development in Romania.

## F. Objectives of CEMP

The **CEMP** describes measures foreseen in order to minimize and manage environmental risks associated with the Projects construction activities.

The key objectives of the CEMP are to:

- ensuring that works are carried out in accordance with appropriate environmental statutory requirements, the conditions of approval for the project, relevant guidelines and existing environmental management systems and procedures
- Define actions that will be implemented by all Contractors and Subcontractors during construction, commissioning and testing of VUTCANI EXTENSION Wind Farm to avoid and/or minimize the potentially adverse environmental, health and safety effects identified in the EIA report
- ensuring that works are carried out in such a way as to minimise the likelihood of environmental degradation occurring
- ensuring that all employees engaged in the works comply with the terms and conditions of the CEMP
- providing clear procedures for management of environmental impact including corrective actions
- ensuring that works are carried out in such a way as to manage the impact of the works on neighbouring land uses
- ensure the construction work procedures minimize potential impacts on the environment and community
- ensure that EDP Renewables (EDPR) Romania and all its Contractors and Subcontractors are committed to the philosophies of good site practice and safe working conditions.

	Document Type:	Plan
<b>Construction Environmental Management Plan</b>	Date:	2012-07-15
	Page:	6 of 25

## II. Environmental objectives and targets

The project is of obvious positive benefit as it will generate electricity from a renewable resource and help Romania meet its EU mandated renewable energy targets. The impacts associated with these additional issues can be avoided or mitigated by adhering to generally recognized performance standards, guidelines or design criteria.

The **EDP's corporate environmental objectives** are to:

- Promote the efficient use of energy, reduction of waste and recycling of materials in all activities
- Encourage ethical environmental practice and behavior including respect for cultural and community values
- Comply with environmental laws applicable to the Project, and met or exceed all relevant statutory obligations and codes of practice to which Company subscribes
- Assess project environmental risks and implement appropriate risk management programs to continually improve performance across the Project
- Report regularly on environmental performance and take remedial action where performance does not meet the expectation
- Communicate the environmental policy to all personnel, contractors and clients through induction, education and training to promote environmental responsibility and obligations
- Influence the suppliers and contractors to act consistently with company approach towards responsible environmental practices.

**The environmental objectives set for VUTCANI EXTENSION wind farm are consistent with EDP's objectives.**

### A. Key Performance Indicators

As means of assessing environmental performance on an ongoing basis, the EDP has set the following KPIs:

- Compliance of environmental legislative or regulatory requirements
- Environmental Incident Frequency Rate (EFIR)
- Spoil and waste recycling rates and
- Monetary value of regulatory penalties incurred.



	Document Type:	Plan
<b>Construction Environmental Management Plan</b>	Date:	2012-07-15
	Page:	7 of 25

Table II.1 Projects Environmental Objectives and targets

Environmental Impact	Objective	Target
Environmental Approvals	Project to be constructed in accordance with planning, environmental and other approvals.	No identified non-compliances with approvals.
Effect on the natural ecosystem due to Project activities	To ensure there are no adverse effects on the natural ecosystem as a result of Project activities beyond those predicted in the EIA for the Works.	<p>To have no release of materials toxic to the natural ecosystem.</p> <p>To cause no unnecessary or irreparable damage to the natural ecosystem during construction.</p>
Air pollution resulting from Project activities	To ensure any release of pollutants to the air is within statutory limits.	To minimise complaints in relation to dust generated by Project.
Noise pollution resulting from Project activities	To keep noise pollution within statutory and contractual requirements.	To minimise complaints in relation to noise generated by Project activities that result from noise levels outside predicted and/or contractual /legislative limits.
Generation of waste	<p>To minimise the generation of waste by:</p> <p>(a) recycling waste to other uses where practicable;</p> <p>(b) ensuring waste materials are deposited in bins / designated areas and that the waste is removed as appropriate.</p>	To separate waste into streams to maximise recycling / reuse to minimise, within budgetary constraints, waste sent to landfill.




	Document Type:	Plan
<b>Construction Environmental Management Plan</b>	Date:	2012-07-15
	Page:	8 of 25

Environmental Impact	Objective	Target
Contaminated Land	To identify contaminated land, minimise the disturbance and ensure there are no adverse impacts on human health or the environment.	<b>No soil contaminated by construction activities to be left on site at the completion of construction.</b>
Deposition of mud and slurry on roadways	To minimise mud and slurry deposited on roadways as a result of Project activities.	To receive no complaints or regulator action relating to mud or slurry being deposited on roadways as a result of Project activities.

### III. Legislative framework

Legislative requirements are described in **Annex 1**.




	Document Type:	Plan
<b>Construction Environmental Management Plan</b>	Date:	2012-07-15
	Page:	9 of 25


#### IV. Statements of commitments

The key list of statements of commitments are presented in the table below:


SoC Reference	SoC Objective	Commitment
<b>General</b>		
	Ensure the adequacy and compliance of Environmental management measures	Environmental Management System(s) will be established and maintained to implement best practice management for environmental impacts.  Dedicated environmental personnel appointed to monitor the performance of the environmental management measures.
<b>Consultation</b>		
	Ensure effective management of complaints	A system to receive, record, track and respond to complaints within a specified timeframe will be established.
<b>Biodiversity</b>		
	Minimise native vegetation disturbance	The limits of clearing and other native vegetation disturbance will be clearly marked on relevant work plans and on site prior to clearing.  Equipment storage areas and stockpile areas will be located in existing cleared locations.
	Offset the impacts of Project on biodiversity and habitat	Revegetation of affected areas by constructions works
<b>Resource Management</b>		
	Reduced demand on resources	Achieve balanced earthworks where feasible.
	Minimise transport	Where feasible, suitable materials will

	Document Type:	Plan
<b>Construction Environmental Management Plan</b>	Date:	2012-07-15
	Page:	10 of 25


SoC Reference	SoC Objective	Commitment
	associated with the demand for resources	be obtained from local existing licensed quarries.
<b>Traffic</b>		
	Minimise impact on traffic due to construction	<p>Construction vehicle movement arrangements will be developed to minimise impacts on other road users with specific regard to other road works in the region, local traffic movement requirements (stock or machinery) and peak traffic volumes, including long weekends and holiday periods.</p> <p>Construction will be planned to minimise disruption to traffic including use of road occupancy licences, variable message signage, static signage and coordination between sections as far as feasible</p>
<b>Social and Economic Considerations</b>		
	Minimise the social and economic impact of the construction works on the local community	All landholders will be informed on works schedule
<b>Air Quality and Greenhouse Gases</b>		
	Minimise generation of dust	Dust will be visually monitored and where necessary best practice mitigation measures will be implemented to minimise the generation of dust.
	Minimise greenhouse gas emissions and air pollution	<p>Plant and equipment will be maintained in a proper and efficient condition and operated in a proper and efficient manner.</p> <p>There will be no burning of green waste or any other wastes.</p> <p>Construction will aim to use electrical energy derived from a renewable energy source</p>

	Document Type:	Plan
<b>Construction Environmental Management Plan</b>	Date:	2012-07-15
	Page:	11 of 25

SoC Reference	SoC Objective	Commitment
<b>Noise and Vibration</b>		
	Minimise the impact of construction noise and vibration on surrounding residents and where necessary, comply with all relevant standards to reduce noise and vibration to an acceptable level	<p>The standard construction hours will be 7.00am to 7.00pm Monday to Friday; 7.00am to 4.00pm Saturdays and no work on Sundays or public holidays.</p> <p>Works required outside of standard construction hours will only be undertaken where the works are essential to be completed in this period and after appropriate consultation with affected residences, and local council and would be planned to minimise disruption to freight traffic.</p> <p>All plant and equipment will be well maintained and fitted with adequately maintained silencers that meet the vehicle design specifications.</p> <p>Prior consultation and notification will be undertaken with nearby residences that may be affected by noise or vibration generating activities.</p> <p>Best management practices will be adopted in accordance with the legislation.</p>
<b>Visual</b>		
	Minimise visual impact	Cuttings and embankments will be graded out wherever feasible to reflect and best fit the characteristics of the local landform.
<b>Waste Minimisation and Management</b>		
	Reduce creation of waste and maximise re-use and recycling	Reuse and recycling and avoidance strategies in accordance with RWMP and CWMP
	Ensure waste generated is managed appropriately	Waste materials will be classified and managed in accordance with legislation in force.
<b>Geology, Soils and Water Quality</b>		

	Document Type:	Plan
<b>Construction Environmental Management Plan</b>	Date:	2012-07-15
	Page:	12 of 25

SoC Reference	SoC Objective	Commitment
	Minimise the risk of soil and underground water contamination	Any construction materials and fuels stored or used on site will be appropriately managed to minimize the risk of soil and underground water contamination. Rehabilitation of disturbed areas will be undertaken progressively.
<b>Contaminated Land</b>		
	Identification and investigation of potentially contaminated sites	A review will be undertaken of all land impacted by the construction activities to identify potentially contaminated sites. Potentially contaminated sites will be further investigated
	Management of previously unidentified contamination	If site contamination investigations indicate that contaminants are present on the site in concentrations above the intended land use criteria, then an appropriate risk based management plan approach would be developed. Where contamination is found to pose unacceptable risk to either the environment or human health receptors a remedial action plan will be developed and remediation works will be undertaken.
<b>Hazard and Risk</b>		
	Minimise the risk of an incident during construction	Activities with the potential for spillage such as refuelling, maintenance of equipment, mixing of cutting oil and bitumen will be conducted in bunded areas to prevent discharge into watercourses. Potentially hazardous and contaminating activities (such as, concrete mixers, and handling hazardous chemicals) will be conducted in bunded areas.

	Document Type:	Plan
<b>Construction Environmental Management Plan</b>	Date:	2012-07-15
	Page:	13 of 25

## V. Roles and responsibilities

**Contractors** and **Subcontractors** will ensure that the environmental commitments according with provisions of **EA** (Environmental Agreement) and applicable **Romanian legislation** in force will be met and that work proceeds in compliance with construction specifications.

The following sections outline the roles and responsibilities of construction staff with respect to environmental management.

The **Contractors** appointed by EDPR have responsibility for:

- Implementing the **CEMP** (Construction Environmental Management Plan);
- Monitoring Sub-Contractor's performance to apply **CEMP**;
- Implementing mechanisms for dealing with problems (as foreseen in EMMP and
- Acting as a point of contact for consultation and feedback with legal consultees, the public and other interested parties.

The **Contractors** will ensure that a copy of this **CEMP** is available on-site and the site personal is familiar with its contents.

An **Environmental Specialized Company** will undertake environmental inspections to audit compliance of the site works with the EA and this **CEMP** and will prepare weekly reports for each wind farm. These reports will be available for EDPR, Contractors and Subcontractors representatives.

Below **Contact Data** of involved parties are presented:

- **Owner: EDPR**


Responsibilities: To ensure the development comply with the requirements of the EA, EMMP and CEMP.

**Construction Project Manager EDPR:**  
**Jaime Gonzalez Chamorro**

Mobile: +40733103846  
E-mail: [Jaime.GonzalezChamorro@edpr.com](mailto:Jaime.GonzalezChamorro@edpr.com)

**Health & Safety Coordinator:**  
**Typsa Blizzard -Dima Nicolae**  
Tel: +40740072219

**Environmental Specialist EDPR:**  
**Laura Lazar**  
Tel: +40 725 929 884  
E-mail: [lauralazar@edpr.com](mailto:lauralazar@edpr.com)

 <b>edp renováveis</b>	Document Type:	Plan
Construction Environmental Management Plan	Date:	2011-05-1
	Page:	14 of 25

## VI. ENVIRONMENTAL AND CONSTRUCTION GUIDELINES


The procedures included in this document will be modified/updated to meet the changing needs of the projects as it proceeds through the design and construction phases.

Environmental management involves compliance with:

- **Environmental Agreement** provisions and Romanian environmental regulations in force;
- **Environmental legislation in force**

The environmental aspects of the construction of the development operations are as follows:

- A.** Agricultural Soils;
- B.** Contaminated Soils;
- C.** Erosion and Sediment Control;
- D.** Site Organization;
- E.** Traffic Control;
- F.** Noise control;
- G.** Dust Control;
- H.** Equipment Maintenance;
- I.** Oils Storage, Handling and Disposal;
- J.** Fuel and hazardous material spills
- K.** Personnel
- L.** Accidents on Site
- M.** Provision of water
- N.** Cement and concrete operation
- O.** Solid waste management
- P.** Site clean up
- Q.** Environmental Monitoring
- R.** Safety monitoring
- S.** Contingency Planning

 <b>edp renováveis</b> Construction Environmental Management Plan	Document Type:	Plan
	Date:	2011-05-1
	Page:	15 of 25

## A. Agricultural Soils

The conservation and maintenance of agricultural soils are of primary concern during construction. Construction activities have the potential to have long-term impacts by changing the physical and chemical properties of agricultural soils and affecting productive capability and future land use. The most common impacts are loss of topsoil resulting from construction activity and compaction.

### Mitigation measures:

- a.1. Ensure that topsoil is removed from any agricultural work areas prior to trenching;
- a.2. Ensure that topsoil and subsoil piles are separated;
- a.3. Ensure that topsoil is not used for trench backfill or padding;
- a.4. Ensure that topsoil and subsoil are restored in the proper sequence;
- a.5. All topsoil stripping shall be monitored by construction staff to ensure that topsoil is removed to the correct depth.

## B. Contaminated Soils

Soil excavation is required for the installation of the Wind Farms facilities. During these activities, it is possible to encounter soil suspected of contamination from known or unknown sources. The purpose of these environmental management practices is to set out the recommended steps for consistent, safe and environmentally responsible handling of such soil. It will assist construction personnel in:


### Mitigation measures:

- b.1. Identifying soil suspected of contamination;
- b.2. Identifying contaminated soil;
- b.3. Minimizing risk to human health and safety, and to the environment when such soils are encountered;
- b.4. Handling such soil in a manner that is in compliance with the relevant environmental legislation; and
- b.5. Minimizing risk to the construction schedule.

For the purposes of this CEMP and for construction of the wind farms, some standard definitions for Suspect and Contaminated Soil is as follows:

Suspect Soil: A soil suspected of being contaminated, based on either sight, smell, past or present land use, or a combination thereof.



 <b>edp renováveis</b> Construction Environmental Management Plan	Document Type:	Plan
	Date:	2011-05-1
	Page:	16 of 25

Contaminated Soil: A soil containing a substance or material whose concentration exceeds regulated limits, or may:

- pose a threat to worker health or safety;
- pose a threat to the environment; or
- pose a threat to public safety.

The **mitigation procedure** consists of the following steps:

- A. Identification;
- B. Secure Suspect Soil and Excavated Area

Each of these steps is described in detail below:

### **I. Identification:**

Suspect soil can usually be identified by sight and smell observations (dependent upon the contaminant present). Some obvious signs of contamination include, but are not limited to:

- (a) Soil discoloration
- (b) Unusual or different soil texture
- (c) Unusual odour
- (d) Vegetation distress
- (e) Standing water or trench with a hydrocarbon sheen
- (f) Abandoned industrial waste (storage tanks and/or infrastructure)


When either suspect or contaminated soils are encountered during excavation, work in the area will be suspended. The SITE ENGINEER will be informed immediately.

### **II. Secure Suspect Soil and Excavated Area:**

In the event that suspect/contaminated soil is encountered, the area will be secured and any unnecessary contact with the soil will be avoided. Work in the vicinity of this soil will be moved to another location at the work site wherever possible. Any suspect/contaminated soil that has been excavated will be secured using the available resources. Potential securing methods will include:

- a) placing the soil on a plasticized tarp;
- b) covering the soil with a plasticized tarp to isolate it from other materials;
- d) placing berms around the tarp to isolate and contain the soil.

If an excavation can be safely left open, the area will be secured as is, until further direction can be obtained. If the excavation cannot be safely left open, then it will be backfilled. Work will be suspended if:

 <b>edp renováveis</b> Construction Environmental Management Plan	Document Type:	Plan
	Date:	2011-05-1
	Page:	17 of 25

- a) continuing to excavate in a suspect/contaminated site could pose a threat to the health and safety of the worker(s);
- b) issues of non-compliance with environmental legislation may result from continuing to work in areas of contaminated soils.

### **C. Erosion And Sediment Control**


Erosion and sediment concerns can arise both during the construction phase of the Project and following construction when the site clean-ups have occurred. Suitable mitigation measures are therefore required for temporary site conditions which occur for a relatively short period during the construction phase as well as for the permanent conditions following the completion of the facilities and cleanup of the work sites.

The grade or slope of the working areas that will be disturbed during the construction phase will determine the amount and complexity of the mitigation measures that will be required to ensure adequate erosion and sediment control. Generically, erosion and sediment control measures will include the application of structures such as:

- a) Runoff Controls - diversion berms, cross trenches;
- b) Erosion Control - diversion ditch and dispersion aprons, gravel sheeting, mulch, erosion control blankets; and
- c) Sediment Control - sediment fence, straw bale barriers, filter berms, sediment traps, settling ponds.

The following points and definitions comprise the basic principles of erosion and sediment control. The CONTRACTORS shall implement these measures where there is a risk of erosion and loss of soil:

- (a) Areas where soil or subsoil has been exposed shall be stabilized by:
  - grading exposed areas to a slope which minimizes the potential for erosion;
  - applying appropriate erosion and sediment control measures; and
    - seeding, mulching or covering with erosion control matting where deemed appropriate by the on-site Inspector or Engineer.
- (b) Sediment and erosion control structures shall be installed prior to site disturbance and meet the quality as outlined in the construction or manufacturers specifications. These measures shall only be removed when the disturbed area is stabilized.
- (c) Sediment and erosion protection measures shall be inspected daily and also during or immediately following heavy rain events.

 <b>edp renováveis</b>	Document Type:	Plan	
	Construction Environmental Management Plan	Date:	2011-05-1
		Page:	18 of 25

#### D. Site Organization

Site organization needs to comply with the legislation in force and with the conditions set in the Building permit.

The conditions that must be complied re:

- d.1. proper signaling
- d.2. fencing
- d.3. proper surfaces for storage materials
- d.4. washing station for equipment and vehicles used on construction works
- d.5. platform for waste selective collection endowed with bins/containers for mixed waste and recyclables.
- d.6. Endowments for involved personnel in the construction works;
- d.7. Fire protection equipment;
- d.8. Proper storage surface for fuels.

#### E. Traffic Control

During construction works a speed limit of 30 km/h will be applied for all vehicles on site.

#### F. Noise Control

During construction, excessive noise from construction equipment may become a nuisance to nearby residents.

The following procedures will be implemented to ensure potential impacts from construction are minimized:


- (a) the CONTRACTOR will use equipment and machinery that are complying the noise limits set in legislation in force.
- (b) wherever possible, the CONTRACTOR shall minimize noise levels during construction.

#### G. Dust Control

During dry conditions, excessive dust may be generated fro the work sites and access roads. This may have a detrimental impact on the local environment, construction safety or integrity, and may also cause disruption to the normal activities of nearby residences.

The **Contractors** and **Subcontractors** will implement the following procedures to ensure potential impacts from construction are minimized:

- (a) will apply dust suppressants such as water;
- (b) will ensure adequate control of dust at work sites

 <b>edp renováveis</b>	Document Type:	Plan
Construction Environmental Management Plan	Date:	2011-05-1
	Page:	19 of 25

## H. Equipment Maintenance

The following procedures will be implemented to ensure a proper equipment maintenance:

- a) Fueling and lubrication of equipment shall occur in designated and approved locations inside the site organization;
- b) washing station for equipment and vehicles used on construction works

## I. Oils Storage, Handling And Disposal

By implementing proper handling storage and disposal of oils during construction, the risk of accidents with impact on environment is reduced.

The following procedures will be implemented to ensure the proper handling, storage and disposal of these materials:

- (a) Fueling and lubrication of equipment shall occur in designated and approved locations;
- (b) Regular inspections of hydraulic and fuel systems on machinery shall be done, and leaks shall be repaired immediately upon detection;
- (c) Waste oils and lubricants shall be retained in a tank or closed container and disposed of in an approved manner;
- (d) Greasy or oily rags or materials subject to spontaneous combustion shall be deposited and stored in an appropriate container.
- (e) All hazardous materials shall be stored with secondary containment and properly signed.


## J. Fuel And Hazardous Material Spills

The response to a spill is described in five phases:

1. The discharger should immediately provide notification of a spill. In some cases, the spill may be discovered and reported by others. The spill report should be as complete as possible and include:

- (a) Name, address and telephone number of reporting source;
- (b) On-site telephone number;
- (c) Exact location and time of spill;
- (d) Estimated amount and type of pollutant;
- (e) Source of pollutant and cause of spill;
- (f) Actions being taken to control spill;
- (g) Wind Speed and direction; and
- (h) Speed and direction of current; damage observed.

2. The spill will be investigated for severity and impacts.

 <b>edp renováveis</b> Construction Environmental Management Plan	Document Type:	Plan
	Date:	2011-05-1
	Page:	20 of 25

3. Measures will be taken to contain the spill and reduce the spread or impact. Under some circumstances dispersants may be necessary.

4. The clean up activities will be undertaken to recover as much oil as possible. Disposal of the recovered materials will be done according with legislation in force.

The CONTRACTOR shall assume the overall responsibility of coordinating a clean-up which will include the following actions:

- (i) deploy on-site personnel to contain the spilled material using a dyke, pit, absorbent material or booms, as appropriate;
- (ii) assess site conditions and environmental impact of various clean-up procedures;
- (iii) choose and implement an appropriate clean-up procedure;
- (iv) deploy on-site personnel to mobilize pumps and empty drums (or other appropriate storage) to the spill site;
- (v) apply absorbents as necessary;
- (vi) remove any contaminated soil as directed by the Site Engineer;
- (vii) dispose of all contaminated debris, water, soil, cleaning materials, and absorbents by placing in an approved disposal site; and
- (viii) take all necessary precautions to ensure that the incident does not recur.

#### **K. Personnel**


The Contractor shall provide the necessary facilities for all site personnel.

- a) The Contractor shall supply an adequate number of chemical or other suitable and approved toilets throughout the site where construction personnel will be operating.
- b) Toilets shall be easily accessible and where applicable shall be capable of being relocated. Toilets shall be cleaned and serviced regularly.
- c) The Contractor shall ensure that any chemicals and/or waste from the toilets are not spilled on the ground at any time. The Contractor shall be responsible for cleaning up any waste deposited by personnel.

#### **L. Accidents On Site**

The Contractor shall comply with the Occupational Health and Safety Act, National Building Regulations and any other national, regional or local regulations with regard to safety on site.

The Contractor shall ensure that contact details of the local medical services are available to the relevant construction personnel prior to commencing work.

 <b>edp renováveis</b> Construction Environmental Management Plan	Document Type:	Plan
	Date:	2011-05-1
	Page:	21 of 25

### **M. Provision Of Water**

The Contractor shall be responsible for providing construction, drinking and washing water for his staff and the professional supervisory staff. Construction water shall be obtained from locations as agreed with the Municipality.

### **N. Cement And Concrete Operations**

The Contractor is advised that cement and concrete are regarded as materials that are potentially damaging to the natural environment on account of the very high pH of the material, and the chemicals contained therein.

The Contractor shall ensure that all operations that involve the use of cement and concrete are carefully controlled.

### **O. Solid Waste Management**

Waste here refers to all construction waste and domestic type waste.

The Contractor shall supply waste bins/containers throughout the site at locations where construction personnel are working.

The Contractor will sign a contract with a specialized agent for mixed and recyclables waste collection.

The bins shall not be used for any purposes other than waste collection.

Petroleum, chemical, harmful and hazardous waste throughout the site shall be stored in enclosed, special organize areas. The bunded areas shall be clearly marked. Such waste shall be disposed of off-site at a hazardous waste disposal site.

### **P. Site Clean Up**


The Contractor shall ensure that all temporary structures, equipment, materials, waste and facilities used for construction activities are removed upon completion of the project.

The Contractor shall clear and clean the construction site to the satisfaction of the Project Manager upon completion of the project.

### **Q. Environmental Monitoring**

A monitoring programme of the environmental effects of the construction works would be implemented. This would:

- Evaluate the effectiveness of environmental mitigation, and identify environmental problems and appropriate responses at an early stage;
- Ensure that the works are carried out in accordance with the provisions of the CEMP; and


 <b>edp renováveis</b>	Document Type:	Plan
Construction Environmental Management Plan	Date:	2011-05-1
	Page:	22 of 25

- Identify and implement any environmental improvements that would contribute to the overall environmental performance of the project.

### **R. Safety Monitoring**

There would be continuous monitoring of safety standards on-site during all construction activities. To ensure that compliance with all existing and forthcoming statutory requirements and industry good practice is adhered to, the Principal Contractor would issue a **Health and Safety Plan** in line with Romanian Legislation in force.




 <b>edp renováveis</b> Construction Environmental Management Plan	Document Type:	Plan
	Date:	2011-05-1
	Page:	23 of 25


## Annex 1. Legislative framework

Applicable environmental legislation on waste matters is detailed below:

- Emergency Government Ordinance on environmental protection no. 195/2005, approved and modified by Law 265/2006 – DC 85/337/CEE (modified by DC 97/11/CE); DC 30/313/CE; DPEC 2001/42/CE; DC 96/62/CEE; DC 99/31/CEE; DC 96/62/CEE; DC 1999/30/CE; DPEC 2000/69/CE; DC 92/72/CEE; DPEC 2002/3/CE; DC 91/689/CEE; DPEC 94/62/CE; DC 99/31/CE; DC 75/439/CEE; DC 91/157/CEE; DC 92/43/CEE; DC 79/409/CEE;
- Government Resolution 352/2005 for the amendment and supplement of Resolution no. 188/2002 – for the approval of the norms regarding the conditions for the discharge of waste water into the aquatic environment. NTPA 002/2002 – establishing the conditions for the discharge of wastewater into sewerage networks of localities and directly to purifying plants.
- Water law no. 107/8.10.1996 updated by law no. 310/30.06.2004 and Law 112/05/2006 - DC 91/271/CEE, DC 98/83/CE;
- Order no. 462/1993 of the Ministry of Water, Forest and Environmental Protection referring to: Technical Conditions on atmosphere protection – Methodological norm on the determination of the atmosphere polluting emissions produced by stationary sources.
- Law 655/2001 for Government Emergency Ordinance no. 243/2000 on atmosphere protection – DC 96/62/CEE
- Order no. 592/2002 of 25.06.2002 for the approval of the Normative on the establishment of limit values, threshold values and evaluation methods for sulphur dioxide, nitrogen dioxide and nitrogen oxides, suspension powders, lead, benzene, carbon monoxide and ozone in the surrounding air – DC 96/62/CEE; DC 1999/30/CE; DPEC 2002/3/CE; DC 93/389/CEE (amended by DC 99/296/CEE); DC 93/12/CEE; DC 99/32/CE;
- STAS 12574/1987 on air quality conditions in protected areas;
- Law no. 84 din 03/12/1993 for Romania's adhesion to the Convention on the protection of the ozone layer adopted in Vienna on March 22, 1985 and the Protocol on the substances consuming the ozone layer, adapted in Montreal on September 16, 1987 and for the acceptance of the Amendment to the Protocol of Montreal on the substances consuming the ozone layer, adopted at the second meeting of the parties in London on June 27-29, 1990 – DC 92/72/CEE; DPEC 2002/3/CE;
- STAS 10009 – 88 – Urban acoustics – Admissible noise level limits.

 <b>edp renováveis</b> Construction Environmental Management Plan	Document Type:	Plan
	Date:	2011-05-1
	Page:	24 of 25

- STAS no. 6156/1986 – noise protection in civil and social-cultural constructions – admissible limits and acoustic insulation parameters;
- Order of the Minister of Health no. 536/1997 – Recommendations for population's life environment, as amended and supplemented by Order of the Minister of Health no. 1028/2004;
- Law on territory management no. 350/2001;
- Law no. 360/2003 on the regime of dangerous chemical substances and preparations, as amended and supplemented by law no. 263/2005 – DC 67/548/EEC; DC 88/379/EEC, R 793/93;
- CODEX – phytosanitary use products homologated in order to be used in Romania;
- Law 426/2001 for the approval of Government Emergency Ordinance no. 78/2000 – on waste regime – DC 75/422 CEE (amended by DC 91/156/CEE); DC 96/59/CE; DPEC 2000/76 CE; DPEC 94/62/CE;
- Law 465/2001 for the approval of Ordinance no. 16/2001 on the management of recyclable industrial waste, as supplemented by Government Emergency Ordinance no. 61/2003;
- Government resolution no. 856/16.08.2002 on the waste management accounts in accordance with the European Waste Catalogue – Decision no. 2001/119 on waste list.
- Government Resolution no. 621/2005 on packaging management – DC 94/62/CE;
- M.M.G.A. Order no. 927/2005 on the reporting procedure for data referring to packaging and waste packaging;
- Ordinance 4/1995 on the manufacturing, sale and use of phytosanitary products used to combat illnesses, pests and weed in agriculture and forestry approved with amendments by Law no. 85/1995 and amended by Law no. 26/28.02.2006.
- Government Resolution no. 235/2007 on the management of waste oils – DC 75/439/CEE (as amended by DC 87/101/CEE and DC 91/692/CEE);
- Government Resolution no. 1057/2001 on the regime of batteries and storage batteries containing dangerous substances – DC 91/157/CEE and DC 93/86/CE;
- Order of the minister of public works, transport and housing no. 418/2001 for the amendment of the Order of the Transport Minister no. 251/1999 for the approval of the regulations on the certification of road vehicles and their observance of the technical norms on road traffic safety, environmental protection used according to the destination, by the periodic technical inspection;

 <b>edp renováveis</b>	Document Type:	Plan
Construction Environmental Management Plan	Date:	2011-05-1
	Page:	25 of 25

- Government Resolution no. 541/2003 on the establishment of measures for the limitation of emissions to the air of certain polluting agents coming from big burning plants, as amended and supplemented by Government Resolution no. 322/2005 – DC 2001/80/EC;
- M.M.G.A. order no. 876/2004 for the approval of the procedure of authorization of activities with a significant environmental impact;
- Governmental Decision no. **445/2009** regarding the environmental impact assessment procedure of certain private and public projects
- Order 1274/2005 – on the release of the environmental permit at the end of the waste disposal activity, namely storage and incineration;
- Government Resolution no. 568/2001 – on the establishment of the technical requirements for the limitation of emissions of volatile organic compounds resulting from the storage, loading, unloading and distribution of gasoline in terminals and petrol stations, amended and supplemented by Government Resolution no. 863/2005.
- Emergency Ordinance no 57/2007 - Regarding the regime of natural protected areas, conservation of natural habitats, flora and fauna